



NEW!



BUBBLE-FREE PRO HOT



BUBBLE-FREE APPLICATOR

Operators can mount and laminate digital prints and apply application tape to any flat surface, banner, table, flat furniture, PMMA up to thicknesses of 60 mm.

- Heated roller up to 60 celsius degrees
- Electric bridge drive up to speed of 6 meter per minute
- Control buttons on both ends for easier operation
- Quick mounting without any bubbles or wrinkles
- Controlled application pressure prevents media stretching
- Easy positioning of material to be mounted
- Fast production speed for increased productivity
- Quick and easy to learn
- Self healing cutting mat

BUBBLE-FREE

Akkor-Dekor Ltd. • Hungary H-2225 Üllő, Pesti út 199-201.
Phone: +36 1 599-9234, +36 1 599-9235
E-mail: akkordekor@akkordekor.hu • www.bubblefree.hu

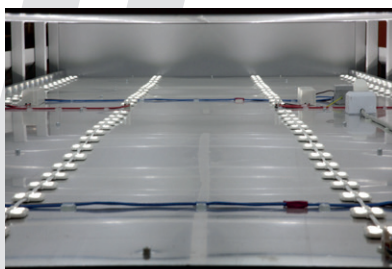

BUBBLE-FREE Pro HOT table is available with:

- glass board and LED lighting
- MDF board and PVC mat

Can be ordered in customized dimensions.

The pressure roller has 10 mm thick soft silicon coating to guarantee the bubble free application.

The pressure roller is controllable from both sides.

The heated roller and electric bridge drive functions ensure high quality lamination.

The pneumatic system uses FESTO parts. The pressure of the roller can be adjusted within a wide range by the pneumatic controllers.

High durability paint in varieties of RAL colors.

The castors with brakes allow the table to be easily moved or fixed in position.

The manual height adjustment feature enables users to adjust table height within 15 cm and level the table on uneven surfaces.



Specifications:

Standard table widths	1480, 1680 mm
Standard working widths	1450, 1640 mm
Standard table lengths	2800, 3400, 4000, 5400 mm
Standard working lengths	2350, 2950, 3550, 4950 mm
Standard operation height	850 mm
Maximum thickness of media	60 mm
Diameter of the rubber roller	120 mm
Machine weight	180-700 kg
Warranty	1+2 year

We keep the rights for any future technical changes.

Optional accessories:

- Silent compressor (85 l/min, 49-56 dB)
- Roll holder at the end of the table
- 5 mm or 7 mm safety PVC cutting mat
- Side tray
- Roller for extra thick media up to 130 mm
- Extra bridge for long table
- KeenCut EVO2 cutting unit
- Electric height adjustment system between 850 mm and 1100 mm